
# WATERMARKED BALL VALVE

Butterfly Handle FI X FI



**Product Specifications** 



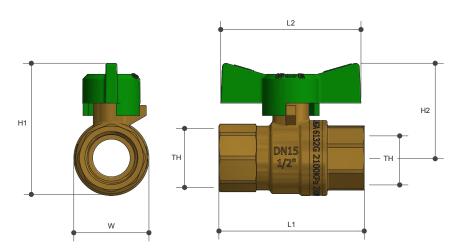

#### **Features**

#### **Specifications**

Working temperature 1  $^{\circ}\text{C}$  to 95  $^{\circ}\text{C}$ 

Maximum pressure rating Water 2500kPa Gas 2100kPa

## Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
BWB15FG	58	56	48	38	30	Rp 1/2"
BWB20FG	66	56	55	41	37	Rp 3/4"

#### Watermark and AGA approved

Full Bore

100% pressure tested

Available in sizes  $15 \, \text{mm} \, (1/2")$  to  $20 \, \text{mm} \, (3/4")$ 

Blow proof spindle

Tested and certified to WMTS012

## Material Chart

Part	Material		
Body	DR Brass		
Seal	PTFE		
Ball	DR Brass		
Bonnet	DR Brass		
Spindle	DR Brass		
O Ring	FKM		
Handle	Aluminium		
Lock Nut	Stainless Steel		

For more information on Logi Valve, contact: Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430

F. 1300 780 441

E. info@austworld.com.au

