


WATERMARKED BALL VALVE

Pressfit CU X MI Low Lead Lever Handle

Product Specifications

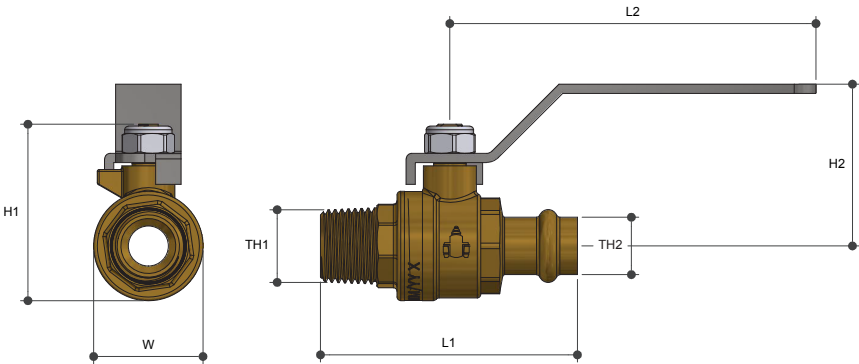

Specifications

Working temperature 1 °C to 90 °C

Maximum pressure rating 1400kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WP20MLL	80	101	55	48	37	R 3/4"	DN20
WP25MLL	95	101	64	52	46	R 1"	DN25

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.0 | 24/05/2021



Features

Watermark approved

Full bore

Available in sizes 20mm (3/4") to 25mm (1")

100% pressure tested

Blow proof spindle

For use with Viega, Rothenberger, Novopress, Kempress, Rems & V-Profile Tools only

Tested and certified to WMTS012

Material Chart

Part	Material
Body	Low Lead DR Brass
Seal	PTFE
Ball	Low Lead DR Brass
Lock Nut	Stainless Steel
Spindle	Stainless Steel
Bonnet	Low Lead DR Brass
O Ring	FKM
Handle	Stainless Steel

